

Powder Coatings for Aluminium Decking

Interpon D Texture ISR: Improved Slip Resistance

- Coarser particle texture for improved slip resistance in dry and wet conditions
- ≥ 60 PTV (dry) and ≥ 50 PTV (wet) in accordance with BS7976-2 +A1 2013 (solid colors)
- A2fl or A2,s1-d0 classified
- Qualicoat Class 1 & 2 compliant
- Various colours can be matched
- Minimum order quantity of 50kgs for solid shades
- Lead time of 5-7 working days



Why PPC Aluminum?


- Complies with Part B UK building regulations
- Sustainable & recyclable material
- No warping or rotting issues associated with traditional timber decking
- Reduced maintenance
- Qualicoat coating material compliant with EN 12206
- Improved aesthetics



Additional finish options available:


Structura

- Over 80 stocked colors in the most popular RAL shades
- Good slip resistance (≥ 40 PTV in dry and ≥ 36 PTV wet)
- Enhanced durability. Qualicoat Class 2 compliant
- A2fl or A2, s1-d0 Classified

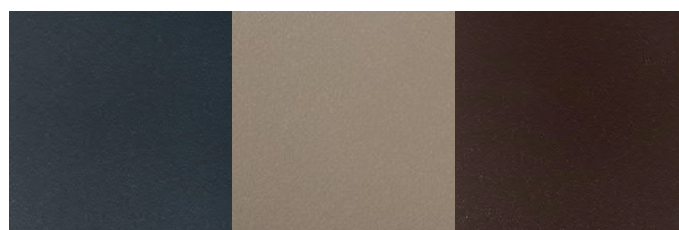


Stone Effect

- Multi-component effects to match stone, concrete and sandstone
- Good slip resistance in dry and wet conditions
- Qualicoat Class 2 compliant
- A2fl or A2, s1-d0 Classified

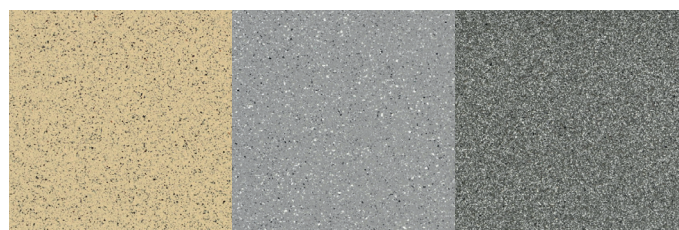

STF: Wood Effect

- Strong aesthetic match to various wood grain forms
- Perfect for the sublimation of heat transfer ink films with high absorption capacity
- Partnership with film supplier allows a variety of effects to be replicated including marble and porcelain

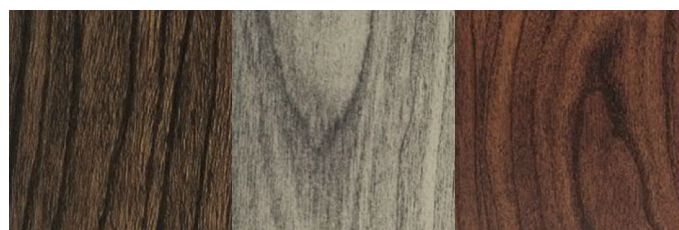

Download our app

AkzoNobel Design app has been created especially for use by architects, specifiers and designers.

Follow us on Social Media:
Powder Coatings by AkzoNobel



For more information visit www.interpon.com
or speak to your local representative

Interpon®

All products supplied & technical advice given are subject to the standard terms of sale of the AkzoNobel supplying company. Copyright ©2021 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel. (Issue 1 - 01/2021).