

# Technical Datasheet

## INTERPON D1036 SATIN

Standard durable polyester powder coatings



### Product description

**Interpon D1036 Satin** is a range of powder coatings intended for use on architectural aluminium and galvanized steel. Available in a wide stock range Interpon D1036 Satin has been specifically formulated without the use of TGIC.

As part of the Interpon D1036 series of architectural powders, Interpon D1036 Satin gives excellent exterior durability and colour retention and conforms to the requirements of all the major European architectural finishing standards. All Interpon D1036 Satin powders are lead-free and meet the requirements of GSB Florida 1, Qualicoat Class 1, EN12206, and EN13438 (formerly BS6496 & BS6497), and AAMA2603.

### Approvals

<b>Qualicoat Approval</b>	P-0237 (FR) P-0772 (IT) P-1020 (TR) P-0531 (ES) P-1085 (UK) P-0923 (CZ) P-0746 (EG) P-0932 (RU)
<b>GSB Approval</b>	108ad (gloss 70)
<b>Resistance to Fire Approval</b>	Classification: A2,s1,d0 with film thickness up to 120 µm (generic polyester D1036, D2525) according to EN13501-1

### Powder properties

	Typical value
<b>Chemical Type</b>	Polyester
<b>Appearance</b>	Smooth Satin
<b>Density</b>	1.2 - 1.9 g/cm <sup>3</sup>
<b>Gloss (60°)</b>	65 - 75 GU
<b>Shelf life</b>	24 months below 30 °C 12 months below 35 °C
<b>Storage Conditions</b>	Under dry, cool ( $\leq 30^{\circ}\text{C}$ ) conditions (open boxes must be resealed)
<b>Curing schedule</b>	20 - 40 min at 170°C 10 - 20 min at 180°C 8 - 16 min at 200°C (object temperature)

### Pre-treatment

For maximum protection it is essential to pretreat components prior to the application of the powdercoating. Aluminium components should receive a full multi-stage chromate conversion coating or suitable chrome-free pre-treatment or suitable pre-anodising to clean and condition the substrate. Detailed advice should be sought from the pre-treatment supplier. Galvanised steel requires surface preparation by either multi-stage pretreatment using either zinc phosphate or chromate conversion or controlled sweep blasting. Depending on the type of galvanizing, degassing or use of anti-bubbling additives may be required – follow the procedural advice of the pretreatment supplier. The products may also be used on cast or mild steel. For outdoor use Interpon Redox PZ anti-corrosive primer over a correctly prepared substrate is recommended.

<http://www.interpon.com/contact-us/>

Copyright © 2024 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel

Revision Date: V19, 15.10.2024

Region: EMEA

**AkzoNobel**

# Technical Datasheet

## INTERPON D1036 SATIN

Standard durable polyester powder coatings



### Application

---

Powders can be applied by manual or automatic electrostatic spray equipment.

This product should be applied at minimum 60µm.

All powders can show small color differences from batch to batch, this is normal and unavoidable.

Bonded products have better application properties than blended products (more stable) but attention should still be paid to line settings in order to avoid "marble effect" and changes in aspect after recycling.

Products with different codes should not be mixed even if same colour and gloss.

Different substrates (aluminium, steel, galvanized steel...), use of primer, and big changes in film thickness may give a different aspect.

While AkzoNobel take every precaution to minimize visible differences, this cannot be guaranteed.

Applicators and fabricators are advised to use a single batch for parts that will be assembled together. Differences are more likely with special effect powders.

For more information, it is suggested to read the Metallic Applications Guidelines.

Clearcoats including tinted clearcoats cannot be applied directly on primers. Only fully opaque shades are suitable for application over primer.

### Recycling

A constant ratio between virgin and recycled powders should be fixed by the coater in order to achieve a consistent effect following the AkzoNobel rules.

Please consult AkzoNobel for further details as to the correct mixing ratio for virgin/reclaim powder.

For solid shades, unused powder can be reclaimed

Unused powder can be reclaimed using suitable equipment and recycled through the coating system, but a minimum of 70% virgin powder should be used.

### Post application

---

For specific advice on the suitability of post coating processes such as bending or the use of sealants, adhesives, thermal break, cleaning etc. Please consult AkzoNobel.

### Test conditions

---

The results are based on mechanical and chemical tests which (unless otherwise indicated) have been carried out under laboratory conditions and are given for guidance only

Testing has been determined under laboratory conditions using the following application properties and is for guidance only.

<b>Pre-treatment</b>	Chrome free Qualicoat/GSB approved pretreatment
----------------------	-------------------------------------------------

<b>Substrate</b>	Aluminum (0.5-0.8 mm Al Mg1)
------------------	------------------------------

<b>Curing schedule</b>	15 min at 190°C (object temperature)
------------------------	--------------------------------------

<b>Film Thickness</b>	60 - 80µm, ISO 2360
-----------------------	---------------------

<http://www.interpon.com/contact-us/>

Copyright © 2024 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel

Revision Date: V19, 15.10.2024

Region: EMEA

**AkzoNobel**

# Technical Datasheet

## INTERPON D1036 SATIN

Standard durable polyester powder coatings



### Mechanical tests

	Typical value	Method/standard
Adhesion	Class 0	ISO 2409 (2 mm Crosshatch)
Erichsen cupping	Pass 5 mm	ISO 1520
Flexibility	Pass 5 mm	ISO 1519
Hardness	>80	ISO 2815 (Buchholz hardness)
Impact resistance	Pass 2,5 Joules reverse & direct (20 in lb)	ISO 6272-2 (d/r)

### Chemical and durability tests

	Typical value	Method/standard
Chemical Resistance	Generally good resistance to acid, alkalis and oil at room temperatures.	
Sulphur Dioxide Resistance	Pass 24 cycles– no blistering, loss of gloss or discoloration	ISO 22479

### Environmental and durability tests

	Typical value	Method/standard
Accelerated weathering	≥50% Gloss retention, 1000 h	ISO16474-2
	≥50% Gloss retention, 300 h	ISO 16474-3 QUV B 313 (GSB)
Acetic acid salt spray	No blistering in excess of 2 (S2) according to ISO 4628-2. Infiltration <16 mm <sup>2</sup> /10 cm, length of any single infiltration shall not exceed 3 mm., 1000 h	ISO 9227
Humidity	No blistering in excess of 2 (S2) according to ISO 4628-2; the maximum infiltration at the cross is 1 mm, 1000 h	ISO 6270-2 CH (Constant humidity)
Exterior durability	Chalking – none in excess of minimum in ASTM D4214 ≥50% gloss retention, Colour retention accords with GSB/Qualicoat 1 year(s)	ISO 2810
Mortar resistance	No effect after 24 hours	EN 12206-1
Wet adhesion	No sign of detachment or blistering. Cross-cut value 0. Qualicoat/GSB Colour change is acceptable.	

### Maintenance

For specific advice on Cleaning and Maintenance, please consult the Interpon D series Cleaning and Maintenance Guidelines available from AkzoNobel.

### Safety Precautions

This product is intended for use only by professional applicators in industrial environments and should not be used without reference to the relevant health and safety data sheet which Akzo Nobel has provided to its customers.

<http://www.interpon.com/contact-us/>

Copyright © 2024 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel

Revision Date: V19, 15.10.2024

Region: EMEA

**AkzoNobel**

# Technical Datasheet

## INTERPON D1036 SATIN

Standard durable polyester powder coatings



### Disclaimer

**IMPORTANT NOTE:** The information in this data sheet is not intended to be exhaustive and is based on the present state of our knowledge and on current laws: any person using the product for any purpose other than that specifically recommended in the technical data sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. It is always the responsibility of the user to take all necessary steps to fulfil the demands set out in the local rules and legislation. Always read the Material Data Sheet and the Technical Data Sheet for this product if available. All advice we give or any statement made about the product by us (whether in this data sheet or otherwise) is correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the many factors affecting the use and application of the product.


Therefore, unless we specifically agree in writing otherwise, we do not accept any liability whatsoever for the performance of the product or for any loss or damage arising out of the use of the product. All products supplied and technical advices given are subject to our standard terms and conditions of sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is subject to modification from time to time in the light of experience and our policy of continuous development. It is the user's responsibility to verify that this data sheet is current prior to using the product.

Brand names mentioned in this data sheet are trademarks of or are licensed to AkzoNobel.

### Appendix

#### Curing window

Interpon D1036 Satin - curing window

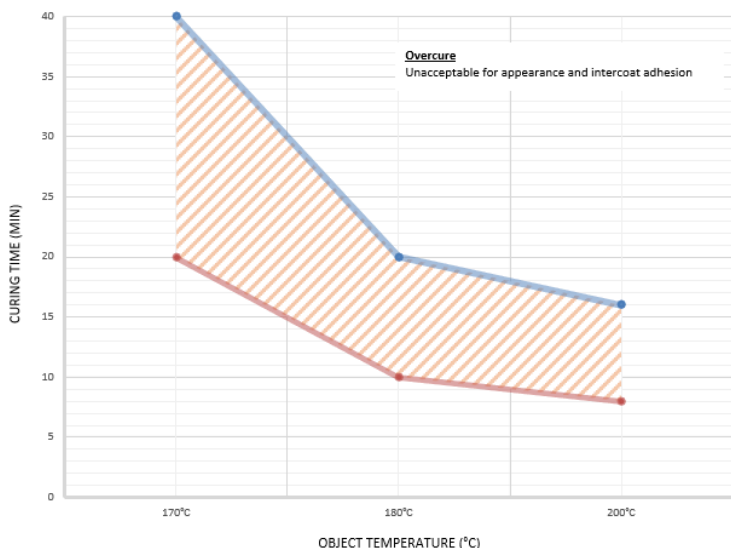

**Disclaimer:**

The data contained in this Curing Window graph is obtained from laboratory coating trials under ideal curing conditions, and using perfectly prepared uncoated testing panels; consequently the curing window needs to be regarded as indicative only. To ensure the correct curing is achieved, specific thermal and performance checks should be

<http://www.interpon.com/contact-us/>

Copyright © 2024 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel

Revision Date: V19, 15.10.2024

Region: EMEA

